


ORDER FORM FOR FIRE GATES GGS

CUSTOMER

PROJECT NAME

EXPECTED DATE OF DELIVERY

PROJECT/OFFER NUMBER

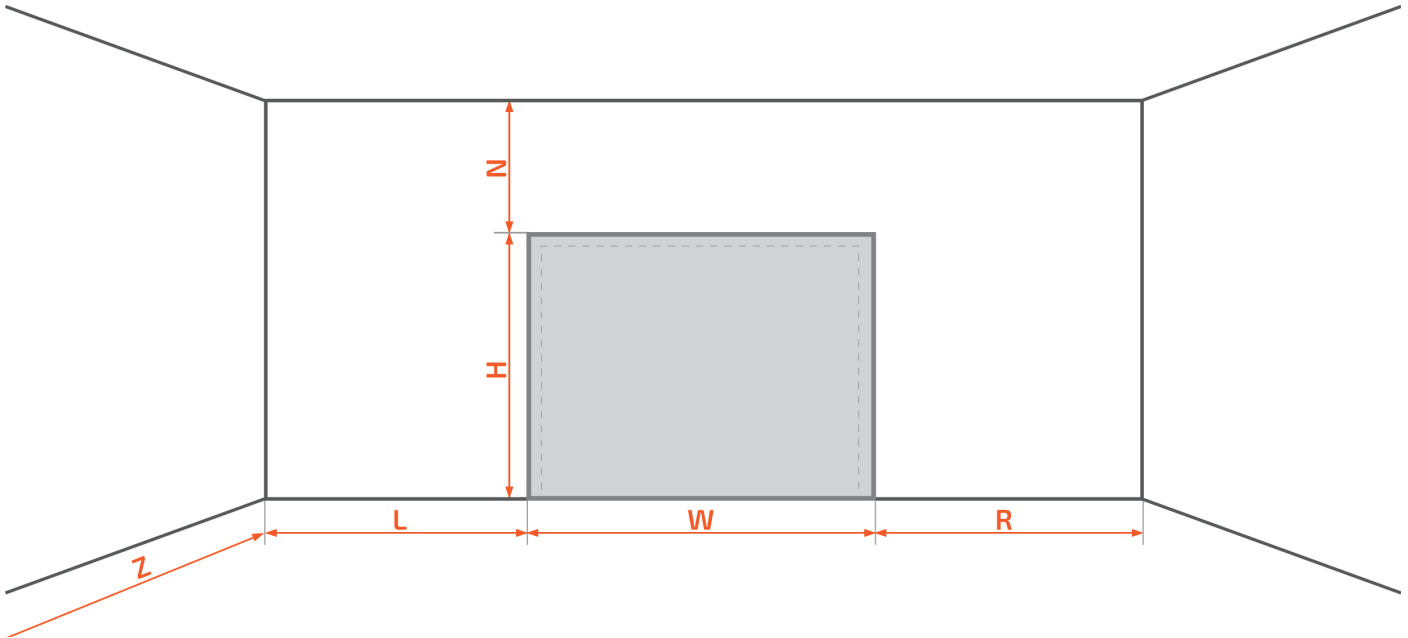

GATE NR.

DIMENSIONS

W	opening width	mm
H	opening height	mm
L	space on the left	mm
R	space on the right	mm
N	lintel	mm
Z	space in front of the wall	mm
	other	

HAND SKETCH

(use in case of more complex conditions, where the standard rough drawing is not sufficient)

NOTE Files for download (catalogues, data sheets, installation manuals, technical manuals...)

ORDER FORM FOR FIRE GATES GGS

CUSTOMER

PROJECT NAME

EXPECTED DATE OF DELIVERY

PROJECT/OFFER NUMBER

NECESSARY ITEMS TO FILL IN

OPENING DIMENSIONS

opening dimensions	opening width	mm
	opening height	mm
dimensions according to the dims. sheet		

FIRE RESISTANCE

EI	EW
number of gates	pcs

CONTROL

brake with counterweight		magnet with counterweight (electromagnet can only be used up to weight 150 kg)
counterweight position		left right both sides
hydraulic system		hydraulic motor hydraulic manual pump
system position		left right
motor	electric self-closing	STANDARD shaft motor SI and control box FS Tronic DES-FI shaft motor SI and control box TS 970/971 (necessary guaranteed power supply)
	gravity self-closing	chain motor FS and control box FS Tronic DES-FS
motor position		left right
other		

SURFACE

BASIC (gate leaf in selected surface finish, other components galvanized)
PLUS (other components in RAL)

SURFACE FINISH

galvanized
RAL standard
RAL other
INOX AISI 304 SB+P (consult with producer)

NOTE request for drawing of steel structure


OPTIONAL ACCESSORIES

PASSAGE DOOR


standard dimensions	900 x 2000 mm	pcs
atypical dimensions	mm	pcs
with low threshold APX. 10 mm (standard)		
with threshold APX. 70 mm		

OPENING ORIENTATION OF PASSAGE DOOR

Pd1 (right, to the room)



Pd3 (right, to the wall)



Pd2 (left, to the wall)



Pd4 (left, to the room)



FITTINGS OF PASSAGE DOOR

roller lock HOBES (standard)
panic lock NEMEF 1769
standard lock FAB
other

DOOR CLOSER

FAB DC 340 (standard)
built-in ITS 96

FRAME + BOTTOM SEALING

rubber (frame + bottom) sealing
other

WINDOW

horizontal 500 x 300 mm	pcs
vertical 300 x 500 mm	pcs

CONTROL DEVICE

(these optional accessories only for brake/ magnet control)

without control device	
control device	AKU module
Blocktronic	

SAFETY EDGE

(available only for motor control)

BATTERY MODULE

(available only for motor control)

DETECTION/WARNING LIGHTS

smoke detector + base	pcs
heat detector + base	pcs
combined detector + base	pcs
warning light (flash + siren)	pcs

OTHER

SIGNATURE, STAMP

DATE